7. Level 2 Repair

7-1. Disassembly

1	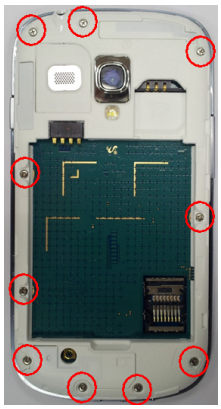 1. Unscrew the screw in Rear(10 points) - SEC CODE : 6001-002667 , 1.4X4 2. Disassemble Rear	2	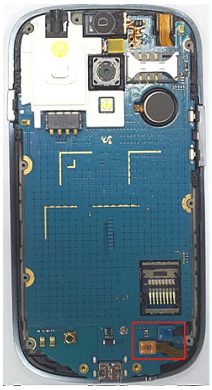 1. Separate the connectors (2 Points)
3	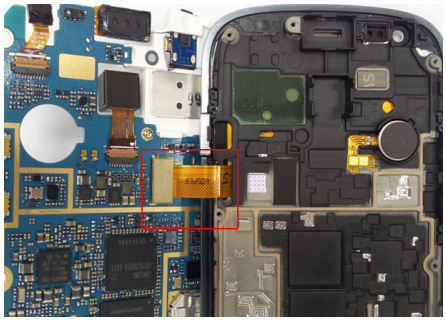 1. Disassemble PBA (Right → Left) 2. Separate the LCD connector (1 Point)	4	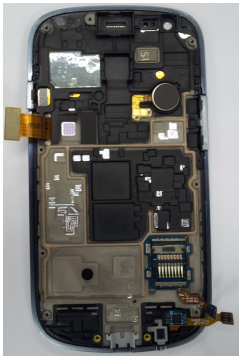 1.Bracket+LCD module (LCD,Bracket can not be separated in normal condition)
5	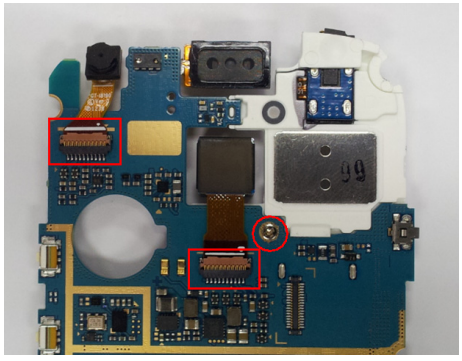 1. Separate the Camera connectors (2 Points) 2. Unscrew the screw in PBA(1 point) - SEC CODE : 6001-002051, 1.4X2.5		

Confidential and proprietary-the contents in this service guide subject to change without prior notice.
Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

7-2. Assembly

1	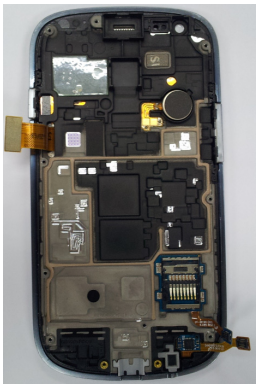 1.Place on Bracket+LCD Module (LCD,Bracket can not be separated in normal condition)	2	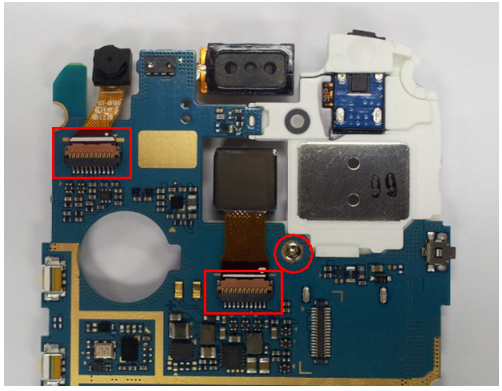 1. Aassemble Cameras(5Mega & VGA) 2. Screw the speaker module screw (1 POINT) - SEC CODE : 6001-002051 , 1.4X2.5 - Torque : 1.1 ± 0.1 Kgf·cm
3	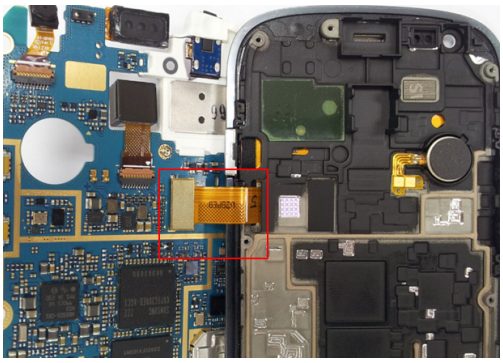 1. Aassemble LCD Connector (1 POINT) 2. Aassemble PBA (Left → Right)	4	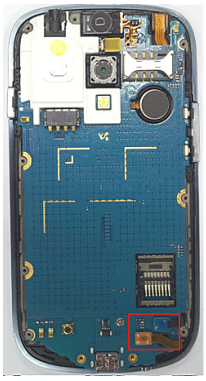 1. Aassemble the Connectors (2 POINT)
5	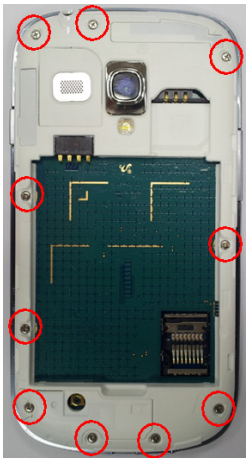 1. Aassemble Rear 2. Screw 10 points in Rear - SEC CODE : 6001-002667 , 1.4X4 - Torque : 1.1 ± 0.1 Kgf·cm		

Confidential and proprietary-the contents in this service guide subject to change without prior notice.
Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.